

Gann Wheel V1.2.15..epub

HDMI section

Connector HDMITM Connector Video inputs/outputs 720 × 480p (60Hz) 16:9

1280 × 720p (60Hz) 16:9 1920 × 1080i (60Hz) 16:9 1280 × 720p (50Hz) 16:9 720 (1440) × 480i (60Hz) 4:3 720 (1440) × 480i (60Hz) 4:3 720 (1440) × 576i (50Hz) 4:3 720 (1440) × 576i (50Hz) 16:9 1920 × 1080p (60Hz) 16:9 1920 × 1080i (50Hz) 16:9 1920 × 1080p (50Hz) 16:9 1920 × 1080p (50Hz) 16:9 1920 × 1080p (24Hz) 16:9 1920 × 1080p (30Hz) 16:9 1920 × 1080p (30Hz) 16:9

Video inputs/ outputs (3D) 1280 × 720p (30Hz) 16:9 Deep Colour: 30bit/36bit 1280 × 720p@59.94/60 Hz

 1280×720 p (24Hz) 16:9

Frame packing

 $1920 \times 1080i@59.94/60 Hz$

Frame packing

 $1920 \times 1080i@59.94/60 Hz$

Side-by-Side (Half)

1920 × 1080p@59.94/60 Hz

Side-by-Side (Half)
1280 × 720p@50 Hz
Frame packing
1920 × 1080i@50 Hz
Frame packing
1920 × 1080i@50 Hz
Side-by-Side (Half)
1920 × 1080p@50 Hz
Side-by-Side (Half)
1920 × 1080p@24 Hz
Frame packing

Deep Colour: 30bit/36bit

Audio inputs Linear PCM 2ch/5.1ch/7.1ch

Dolby Digital

DTS

Each signal is compliant with 32, 44.1,

48 kHz.

Speakers

Front speaker unit

Speaker system 2-way 2-driver, Bass reflex type Speaker unit Woofer: 30×100 mm cone type $\times 1$

Tweeter: 30 mm cone type

Subwoofer unit

Speaker system Subwoofer, Bass reflex type

Speaker unit 70 mm cone type

General


Power requirements 100 - 240 V, 50/60 Hz

Power consumption On: 12 W Standby: 0.7 W

- Standby power consumption: 0.7 W
- Halogenated flame retardants are not used in the certain printed wiring boards.
- Over 85% power efficiency of amplifier block is achieved with the full digital amplifier, S-Master.

Design and specifications are subject to change without notice.

Gann Wheel V1.2.15..epub

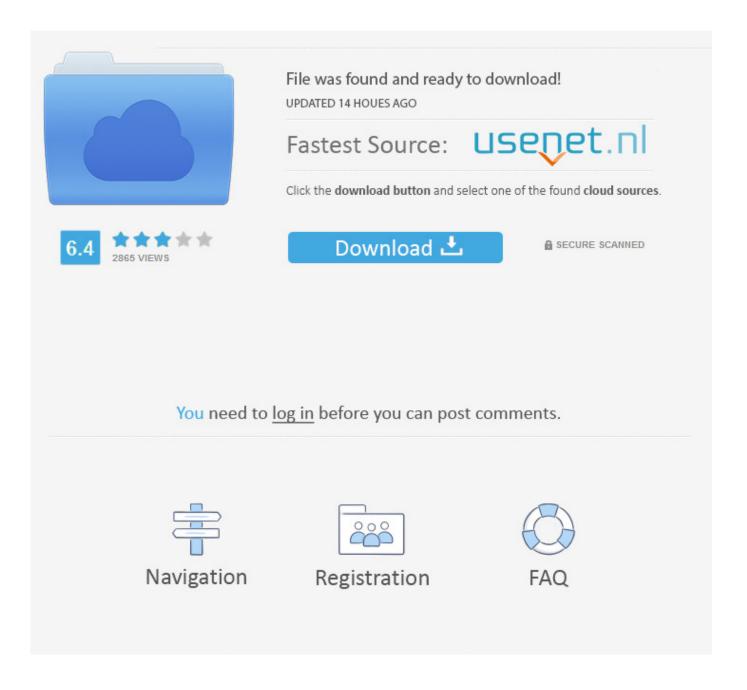

3/4

4/4